

COMPACT20



Also available in
Cold Store Version -30°C



Speed Selector
to operate with the tiller
in the upright position



COMPACT AND HANDY

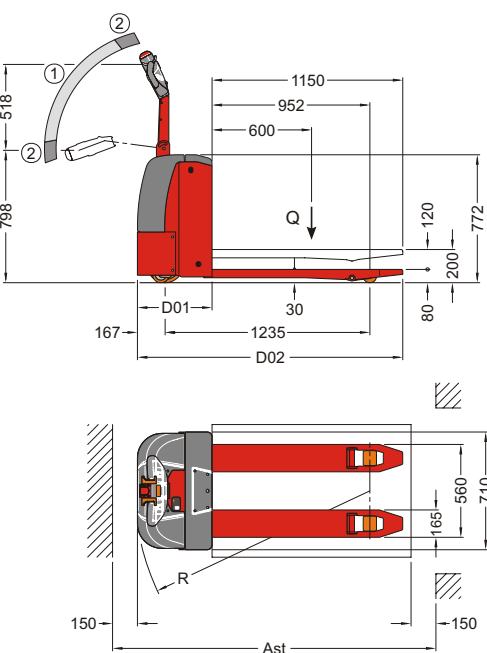


**Built-in or external high
frequency batteries charger**

Pegasolift 

CE

COMPACT20 SERIES

DIMENSIONS SCHEME		GENERAL SPECIFICATIONS			
<div style="border: 1px solid black; padding: 2px; width: fit-content;">1 RUNNING</div> <div style="border: 1px solid black; padding: 2px; width: fit-content;">2 BRAKING</div> 	LAST UPDATE: 15/01/2009	MODEL	COMPACT20-SC	COMPACT20-LC	
		Load capacity (Q)	2000 kg		
		Weight without load and with lead batteries	356 kg	422 kg	
		Front rollers truck	485		
		Rear balance wheel truck	545		
		Chassis length	D01	450 mm	515 mm
		Total length	D02	1600 mm	1665 mm
		Steering radius	R	1417 mm	1482 mm
		Working aisle width	Ast	1850 mm	1915 mm
		Single front rollers size	Poliurethane	n° 2 rollers ø 80 × 90	
		Double front rollers size (OPTIONAL)	Poliurethane	n° 2+2 rollers ø 80 × 70	
		Drive wheel size	Poliurethane	ø 245×76	
		Balance wheels size	Poliurethane	ø 100 × 40	
		Travel speed	with load	4,2 km/h	
			without load	5,1 km/h	
		Lifting speed	with load	0,072 m/s	
			without load	0,110 m/s	
		Lowering speed	with load	0,380 m/s	
			without load	0,110 m/s	
		Max Gradeability	with load	5,0%	
			without load	10,0%	
		Brake	Electromagnetic		
		Electronic control type	Mosfet 24V 200A		
		Traction motor power	Separate excite system	1200W	
		Pump power motor	800W		
		Noise	65 dB		
		High frequency battery charger and traction battery equippable	24V 20A built-it 24V 150Ah (125 kg)	24V 20A built-in 2×12V 155Ah (65 kg) 24V 30A external 24V 195Ah (188 kg)	



COMPACT20 is a pallet truck agile and sturdy, designed for the work in limited environment where permits an excellent manoeuvrability also at full load, thank to the powerful motor and to the reduced dimensions.

The switch to operate with the tiller in the upright position, placed on the control head, make much more simple avoid sudden accelerations during the delicate manoeuvres, avoiding useless damage to the goods and to the pallet truck.

Battery charge indicator with LCD hours counter and block of the forks with flat battery included.

All the series in equippable with various optional as: trail-proof rubber wheel and cold store version -30°C.

www.pegasolift.com

Pegasolift 

Via del Lavoro 14 - 37047 San Bonifacio (Verona - Italy)
Tel. (0039) 045/7665570 - Fax: (0039) 045/7665698
www.pegasolift.com



All the pallet trucks of COMPACT20 series are manufactured according to the EEC Directive 98/37/CE